





# SE25/30(s)/35

80V Electric 4 wheel Lift Trucks

Superelastic Tyres

2500 kg    3000 kg    3500 kg

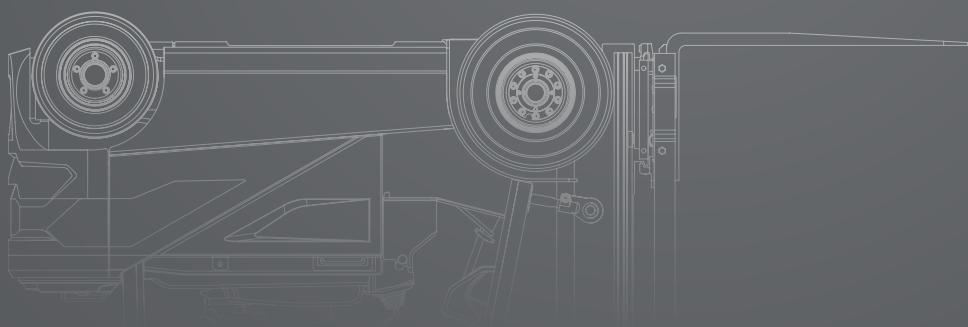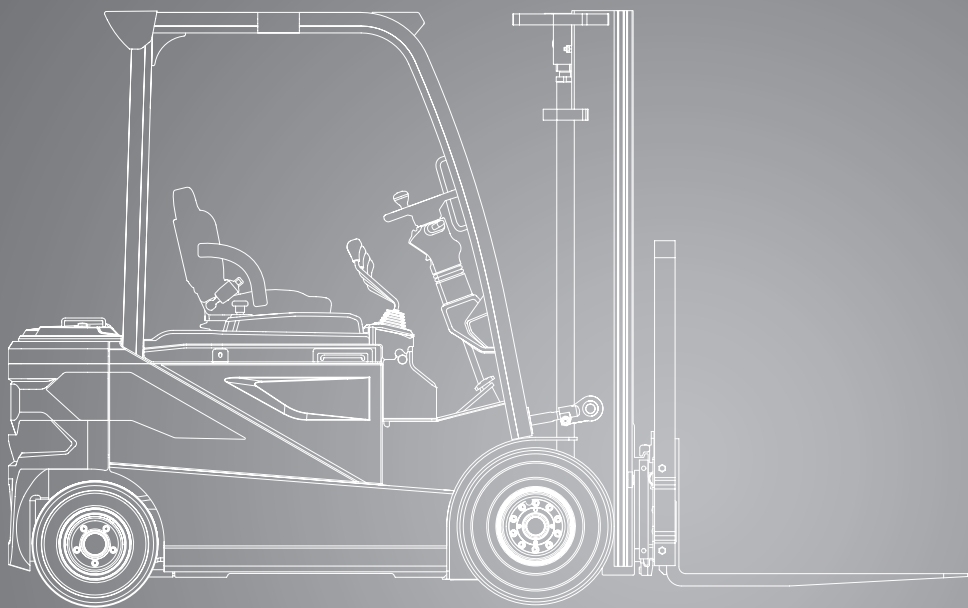


**LI-ION**

[www.clarkmheu.com](http://www.clarkmheu.com)

# DIMENSIONS

## SE25/30(s)/35

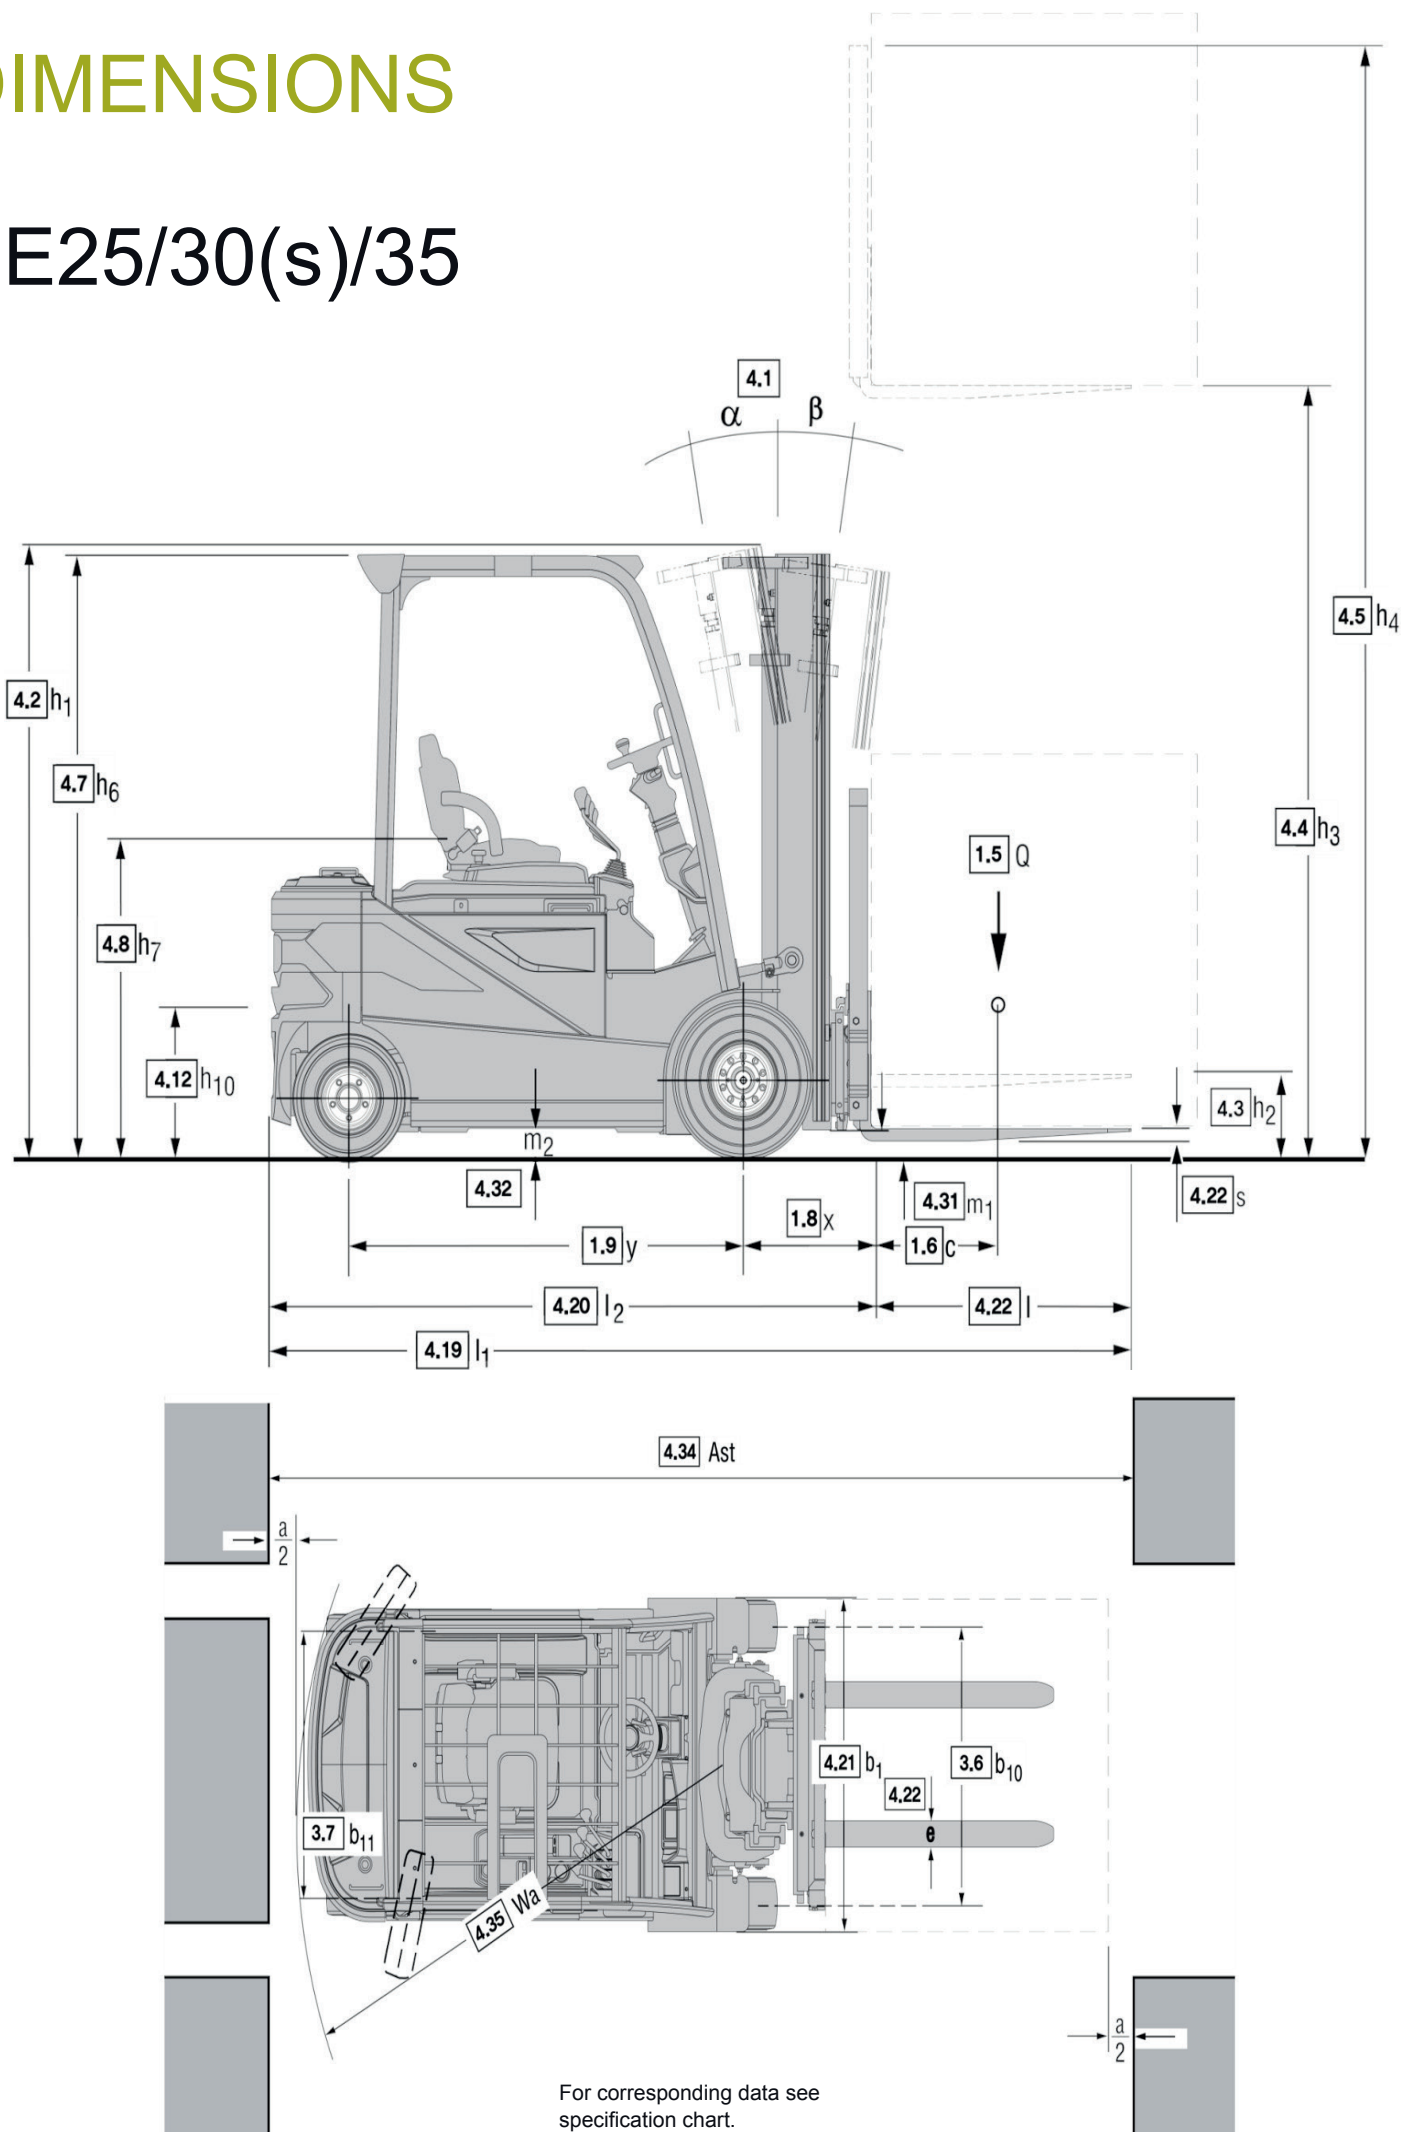

# SPECIFICATIONS

## Product Specifications acc. to VDI 2198

| 1.1 Manufacturer (Abbreviation) |                                                                      | CLARK                 | CLARK                 |
|---------------------------------|----------------------------------------------------------------------|-----------------------|-----------------------|
| Specifications                  | 1.2 Manufacturer's designation                                       | SE25                  | SE30s                 |
|                                 | 1.3 Drive unit                                                       | Electric-80V          | Electric-80V          |
|                                 | 1.4 Operator type stand on/driver seated                             | Rider-seated          | Rider-seated          |
|                                 | 1.5 Load capacity/rated load Q (kg)                                  | 2500                  | 3000                  |
|                                 | 1.6 Load centre distance c (mm)                                      | 500                   | 500                   |
|                                 | 1.8 Load centre distance, centre of drive axle to fork face x (mm)   | 424                   | 434                   |
|                                 | 1.9 Wheelbase y (mm)                                                 | 1610                  | 1610                  |
| Weight                          | 2.1 Service weight kg                                                | 4571 (4487)           | 4921 (4836)           |
|                                 | 2.2 Axle loading, laden front/rear kg                                | 6118/853 (6083/903)   | 6932/988 (6898/939)   |
|                                 | 2.3 Axle loading, unladen front/rear kg                              | 2183/2388 (2149/2338) | 2192/2729 (2157/2679) |
| Tyres, Chassis                  | 3.1 Tyre type, SE = superelastic, C = cushion                        | SE                    | SE                    |
|                                 | 3.2 Tyre size, front, superelastic                                   | 23 x 9 - 10           | 23 x 9 - 10           |
|                                 | 3.3 Tyre size, rear, superelastic                                    | 18 x 7 - 8            | 18 x 7 - 8            |
|                                 | 3.5 Wheels, number front/rear (x = drive wheels)                     | 2 x/2                 | 2 x/2                 |
|                                 | 3.6 Tread, front SE (C) b10 (mm)                                     | 1069                  | 1069                  |
|                                 | 3.7 Tread, rear b11 (mm)                                             | 973                   | 973                   |
| Dimensions                      | 4.1 Tilt of upright/fork carriage, a/b deg                           | 8/8                   | 8/8                   |
|                                 | 4.2 Height, upright lowered h1 (mm)                                  | 2165                  | 2165                  |
|                                 | 4.3 Freelif h2 (mm)                                                  | 110                   | 110                   |
|                                 | 4.4 Lift height *1 h3 (mm)                                           | 3300                  | 3300                  |
|                                 | 4.5 Height, upright extended (with load backrest) h4 (mm)            | 4520                  | 4520                  |
|                                 | 4.7 Height overheadguard (Cabin) h6 (mm)                             | 2212 (2238)           | 2212 (2238)           |
|                                 | 4.8 Seat height h7 (mm)                                              | 1150                  | 1151                  |
|                                 | 4.12 Coupling height h10 (mm)                                        | 530                   | 530                   |
|                                 | 4.19 Overall length l1 (mm)                                          | 3418                  | 3443                  |
|                                 | 4.20 Length to face of forks l2 (mm)                                 | 2351                  | 2376                  |
|                                 | 4.21 Width b1 (mm)                                                   | 1274                  | 1274                  |
|                                 | 4.22 Fork dimensions s*e*l (mm)                                      | 45 x 100 x 1067       | 45 x 122 x 1067       |
|                                 | 4.23 Fork carriage DIN 15173, A, B                                   | II A                  | III A                 |
|                                 | 4.24 Fork carriage width b3 (mm)                                     | 1040                  | 1040                  |
|                                 | 4.31 Ground clearance minimum, laden m1 (mm)                         | 135                   | 135                   |
|                                 | 4.32 Ground clearance centre of wheelbase m2 (mm)                    | 110                   | 110                   |
|                                 | 4.34 Stacking aisle for pallets (l6 • b12) 1000x1200 across Ast (mm) | 3672                  | 3672                  |
|                                 | 4.34 Stacking aisle for pallets (l6 • b12) 800x1200 along Ast (mm)   | 3800                  | 3800                  |
| Performance                     | 4.35 Turning radius Wa (mm)                                          | 1943                  | 1943                  |
|                                 | 4.36 Internal Turning radius b13 (mm)                                | -                     | -                     |
|                                 | 5.1 Travel speed laden/unladen km/h                                  | 19/20                 | 19/20                 |
|                                 | 5.2 Lift speed laden/unladen m/s                                     | 0.38/0.50             | 0.34/0.50             |
|                                 | 5.3 Lowering speed laden/unladen m/s                                 | 0.54/0.47             | 0.50/0.47             |
| Drive line                      | 5.6 Max. drawbar pull laden/unladen (S2 5 min) *2 N                  | 20427/10562           | 20536/10623           |
|                                 | 5.8 max. gradeability laden/unladen (S2 5 min) *2 %                  | 32.2/24.7             | 28.1/23.8             |
|                                 | 5.10 Service brake                                                   | Wet-disc              | Wet-disc              |
|                                 | 6.1 Drive motor rating (S2 60 min) kW                                | 2 x 9.0               | 2 x 9.0               |
|                                 | 6.2 Lift motor rating (S3 15 %)                                      | 19.7                  | 19.7                  |
| Misc.                           | 6.3 Battery acc. to DIN43531/35/36                                   | DIN43536A             | DIN43536A             |
|                                 | 6.4 Battery voltage, nominal capacity K5 V/Ah                        | 80/620                | 80/620                |
|                                 | 6.4.1 Battery voltage, nominal capacity K5 Li-Ion V/Ah               | 80/560                | 80/560                |
|                                 | 6.5 Battery weight (min) kg                                          | 1642 (1558)           | 1642 (1558)           |
|                                 | 8.1 Type of control                                                  | AC/Inverter           | AC/Inverter           |
| Misc.                           | 8.2 Operating pressure for attachments kg/cm2                        | adjustable            | adjustable            |
|                                 | 8.4 Sound level, driver's ear*3 dB (A)                               | 70                    | 70                    |

\*1 Further lift heights see upright table

\*2 At friction coefficient  $\mu=0.8$  with 1.6 km/h

\*3 acc. to DIN EN 12053

All values shown are for standard lift truck with standard equipment. If the truck is supplied with options, values may change. All values given may vary + 5 % and - 10 % due the motor and system tolerances and represent nominal values obtained under typical operating conditions. Specifications for Non-emission limited truck.

# SPECIFICATIONS

## Product Specifications acc. to VDI 2198

| 1.1 Manufacturer (Abbreviation) |                                                                      | CLARK                 | CLARK                 |
|---------------------------------|----------------------------------------------------------------------|-----------------------|-----------------------|
| Specifications                  | 1.2 Manufacturer's designation                                       | SE30                  | SE35                  |
|                                 | 1.3 Drive unit                                                       | Electric-80V          | Electric-80V          |
|                                 | 1.4 Operator type stand on/driver seated                             | Rider-seated          | Rider-seated          |
|                                 | 1.5 Load capacity/rated load Q (kg)                                  | 3000                  | 3500                  |
|                                 | 1.6 Load centre distance c (mm)                                      | 500                   | 500                   |
|                                 | 1.8 Load centre distance, centre of drive axle to fork face x (mm)   | 434                   | 439                   |
|                                 | 1.9 Wheelbase y (mm)                                                 | 1750                  | 1750                  |
| Weight                          | 2.1 Service weight kg                                                | 5161 (5043)           | 5578 (5462)           |
|                                 | 2.2 Axle loading, laden front/rear kg                                | 6987/1174 (6938/1106) | 7793/1285 (7744/1218) |
|                                 | 2.3 Axle loading, unladen front/rear kg                              | 2386/2775 (2336/2707) | 2415/3163 (2366/3096) |
| Tyres, Chassis                  | 3.1 Tyre type, SE = superelastic, C = cushion                        | SE                    | SE                    |
|                                 | 3.2 Tyre size, front, superelastic                                   | 23 x 9 - 10           | 23 x 10 - 12          |
|                                 | 3.3 Tyre size, rear, superelastic                                    | 18 x 7 - 8            | 18 x 7 - 8            |
|                                 | 3.5 Wheels, number front/rear (x = drive wheels)                     | 2 x / 2               | 2 x / 2               |
|                                 | 3.6 Tread, front SE (C) b10 (mm)                                     | 1069                  | 1110                  |
|                                 | 3.7 Tread, rear b11 (mm)                                             | 973                   | 973                   |
| Dimensions                      | 4.1 Tilt of upright/fork carriage, a/b deg                           | 8/8                   | 8/8                   |
|                                 | 4.2 Height, upright lowered h1 (mm)                                  | 2165                  | 2165                  |
|                                 | 4.3 Freelif h2 (mm)                                                  | 110                   | 115                   |
|                                 | 4.4 Lift height *1 h3 (mm)                                           | 3300                  | 3165                  |
|                                 | 4.5 Height, upright extended (with load backrest) h4 (mm)            | 4520                  | 4395                  |
|                                 | 4.7 Height overheadguard (Cabin) h6 (mm)                             | 2212 (2238)           | 2212 (2238)           |
|                                 | 4.8 Seat height h7 (mm)                                              | 1151                  | 1151                  |
|                                 | 4.12 Coupling height h10 (mm)                                        | 530                   | 530                   |
|                                 | 4.19 Overall length l1 (mm)                                          | 3568                  | 3648                  |
|                                 | 4.20 Length to face of forks l2 (mm)                                 | 2501                  | 2581                  |
|                                 | 4.21 Width b1 (mm)                                                   | 1274                  | 1353                  |
|                                 | 4.22 Fork dimensions s*e*l (mm)                                      | 45 x 122 x 1067       | 50 x 125 x 1067       |
|                                 | 4.23 Fork carriage DIN 15173, A, B                                   | III A                 | III A                 |
|                                 | 4.24 Fork carriage width b3 (mm)                                     | 1040                  | 1045                  |
|                                 | 4.31 Ground clearance minimum, laden m1 (mm)                         | 135                   | 135                   |
|                                 | 4.32 Ground clearance centre of wheelbase m2 (mm)                    | 110                   | 110                   |
|                                 | 4.34 Stacking aisle for pallets (l6 • b12) 1000x1200 across Ast (mm) | 3821                  | 3901                  |
|                                 | 4.34 Stacking aisle for pallets (l6 • b12) 800x1200 along Ast (mm)   | 3949                  | 4029                  |
|                                 | 4.35 Turning radius Wa (mm)                                          | 2078                  | 2108                  |
|                                 | 4.36 Internal Turning radius b13 (mm)                                | -                     | -                     |
| Performance                     | 5.1 Travel speed laden/unladen km/h                                  | 19/20                 | 19/20                 |
|                                 | 5.2 Lift speed laden/unladen m/s                                     | 0.34/ 0.50            | 0.30/ 0.50            |
|                                 | 5.3 Lowering speed laden/unladen m/s                                 | 0.50/ 0.47            | 0.53/ 0.50            |
|                                 | 5.6 Max. drawbar pull laden/unladen (S2 5 min) *2 N                  | 20574/10827           | 21055/12753           |
|                                 | 5.8 max. gradeability laden/unladen (S2 5 min) *2 %                  | 29.6/25               | 25/24                 |
| Drive line                      | 5.10 Service brake                                                   | Wet-disc              | Wet-disc              |
|                                 | 6.1 Drive motor rating (S2 60 min) kW                                | 2 x 9.0               | 2 x 9.0               |
|                                 | 6.2 Lift motor rating (S3 15 %)                                      | 19.7                  | 19.7                  |
|                                 | 6.3 Battery acc. to DIN43531/35/36                                   | DIN43536A             | DIN43536A             |
|                                 | 6.4 Battery voltage, nominal capacity K5 V/Ah                        | 80/775                | 80/775                |
|                                 | 6.4.1 Battery voltage, nominal capacity K5 Li-Ion V/Ah               | 80/560                | 80/560                |
|                                 | 6.5 Battery weight (min) kg                                          | 1990 (1873)           | 1990 (1873)           |
| Misc.                           | 8.1 Type of control                                                  | AC / Inverter         | AC / Inverter         |
|                                 | 8.2 Operating pressure for attachments kg/cm2                        | adjustable            | adjustable            |
|                                 | 8.4 Sound level, driver's ear*3 dB (A)                               | 70                    | 70                    |

\*1 Further lift heights see upright table


\*2 At friction coefficient  $\mu=0.8$  with 1.6 km/h

\*3 acc. to DIN EN 12053

All values shown are for standard lift truck with standard equipment. If the truck is supplied with options, values may change. All values given may vary + 5 % and - 10 % due the motor and system tolerances and represent nominal values obtained under typical operating conditions. Specifications for Non-emission limited truck.

# GENERAL DATA

## Truck Capacities Capacity at different load centres

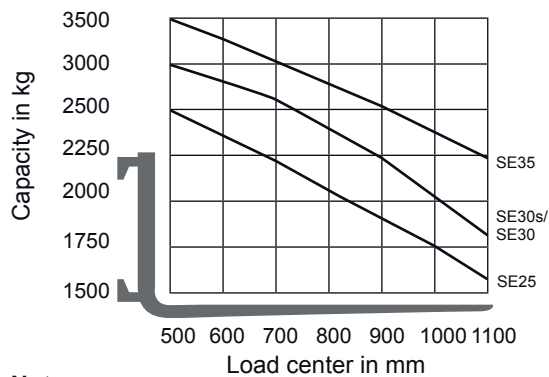

### Note:

The listed capacities are valid only for the standard upright in vertical position with standard fork carriage and standard forks, up to max. lifting height of 3300 mm. The centre of gravity of the load may be displaced by max. 100 mm against the longitudinal centre plane of the truck. Load centre is determined from top and front face of the forks. The values are based on a 1000 mm cube load configuration with the centre of gravity at the true centre of the cube with upright tilted forward lower capacity values are valid. Attachments, longer forks, exceptional load dimensions and higher lifting heights can reduce the capacity.

Please talk to your CLARK dealer if you require further information.

## Upright table SE 25

| Type  | Maximum Fork Height (h3) | Mast Lowered (h1) | Mast Extended (h4) |                       | Free lift (h2)     |                       |
|-------|--------------------------|-------------------|--------------------|-----------------------|--------------------|-----------------------|
|       |                          |                   | with load backrest | without load backrest | with load backrest | without load backrest |
|       | mm                       | mm                | mm                 | mm                    | mm                 | mm                    |
| STD   | 2120                     | 1575              | 3340               | 2718                  | 110                | 110                   |
|       | 2980                     | 2005              | 4200               | 3578                  |                    |                       |
|       | 3300                     | 2165              | 4520               | 3898                  |                    |                       |
|       | 3500                     | 2305              | 4720               | 4098                  |                    |                       |
|       | 3725                     | 2455              | 4944               | 4322                  |                    |                       |
|       | 3860                     | 2530              | 5080               | 4458                  |                    |                       |
|       | 4165                     | 2800              | 5384               | 4762                  |                    |                       |
|       | 4380                     | 3000              | 5600               | 4978                  |                    |                       |
|       | 4620                     | 3230              | 5840               | 5218                  |                    |                       |
|       | 5170                     | 3495              | 6390               | 5768                  |                    |                       |
| TSU   | 4320                     | 2005              | 5539               | 4943                  | 786                | 1382                  |
|       | 4600                     | 2100              | 5819               | 5223                  | 881                | 1477                  |
|       | 4800                     | 2165              | 6019               | 5423                  | 946                | 1542                  |
|       | 5210                     | 2305              | 6429               | 5833                  | 1086               | 1682                  |
|       | 5520                     | 2455              | 6739               | 6143                  | 1236               | 1832                  |
|       | 5740                     | 2530              | 6959               | 6363                  | 1311               | 1907                  |
|       | 6100                     | 2690              | 7319               | 6723                  | 1471               | 2067                  |
|       | 6370                     | 2800              | 7589               | 6993                  | 1581               | 2177                  |
|       | 6830                     | 3000              | 8049               | 7453                  | 1781               | 2377                  |
|       | 7315                     | 3230              | 8534               | 7938                  | 2011               | 2607                  |
|       | -                        | -                 | -                  | -                     | -                  | -                     |
| HI-LO | 2935                     | 2005              | 4155               | 3627                  | 786                | 1314                  |
|       | 3255                     | 2165              | 4475               | 3947                  | 946                | 1474                  |
|       | 3530                     | 2305              | 4750               | 4222                  | 1086               | 1614                  |
|       | 3760                     | 2455              | 4980               | 4452                  | 1236               | 1764                  |
|       | 3910                     | 2530              | 5128               | 4600                  | 1311               | 1839                  |

## Upright table SE 35

| Type | Maximum Fork Height (h3) | Mast Lowered (h1) | Mast Extended (h4) |                       | Free lift (h2)     |                       |
|------|--------------------------|-------------------|--------------------|-----------------------|--------------------|-----------------------|
|      |                          |                   | with load backrest | without load backrest | with load backrest | without load backrest |
|      | mm                       | mm                | mm                 | mm                    | mm                 | mm                    |
| STD  | 1985                     | 1575              | 3215               | 2662                  | 115                | 115                   |
|      | 2845                     | 2005              | 4075               | 3522                  |                    |                       |
|      | 3165                     | 2165              | 4395               | 3842                  |                    |                       |
|      | 3365                     | 2305              | 4595               | 4042                  |                    |                       |
|      | 3590                     | 2455              | 4819               | 4266                  |                    |                       |
|      | 3725                     | 2530              | 4955               | 4402                  |                    |                       |
|      | 4030                     | 2800              | 5255               | 4702                  |                    |                       |
|      | 4245                     | 3000              | 5471               | 4918                  |                    |                       |
|      | 4485                     | 3230              | 5711               | 5158                  |                    |                       |
|      | 5035                     | 3495              | 6261               | 5708                  |                    |                       |
| TSU  | 4140                     | 2005              | 5369               | 4836                  | 786                | 1319                  |
|      | 4620                     | 2165              | 5839               | 5306                  | 946                | 1479                  |
|      | 4800                     | 2165              | 6019               | 5486                  | 946                | 1479                  |
|      | 5030                     | 2305              | 6259               | 5726                  | 1086               | 1619                  |
|      | 5340                     | 2455              | 6569               | 6036                  | 1236               | 1769                  |
|      | 5560                     | 2530              | 6789               | 6456                  | 1311               | 1844                  |
|      | 5920                     | 2690              | 7149               | 6616                  | 1471               | 2004                  |
|      | 6190                     | 2800              | 7419               | 6886                  | 1581               | 2114                  |
|      | 6650                     | 3000              | 7879               | 7346                  | 1781               | 2314                  |
|      | 7315                     | 3230              | 8364               | 7831                  | 2011               | 2544                  |

## Upright table SE 30s/30

| Type  | Maximum Fork Height (h3) | Mast Lowered (h1) | Mast Extended (h4) |                       | Free lift (h2)     |                       |
|-------|--------------------------|-------------------|--------------------|-----------------------|--------------------|-----------------------|
|       |                          |                   | with load backrest | without load backrest | with load backrest | without load backrest |
|       | mm                       | mm                | mm                 | mm                    | mm                 | mm                    |
| STD   | 2020                     | 1575              | 3340               | 2787                  | 110                | 110                   |
|       | 2980                     | 2005              | 4200               | 3647                  |                    |                       |
|       | 3300                     | 2165              | 4520               | 3967                  |                    |                       |
|       | 3500                     | 2305              | 4720               | 4167                  |                    |                       |
|       | 3725                     | 2455              | 4944               | 4391                  |                    |                       |
|       | 3860                     | 2530              | 5080               | 4527                  |                    |                       |
|       | 4165                     | 2800              | 5384               | 4831                  |                    |                       |
|       | 4380                     | 3000              | 5600               | 5047                  |                    |                       |
|       | 4620                     | 3230              | 5840               | 5287                  |                    |                       |
|       | 5170                     | 3495              | 6390               | 5837                  |                    |                       |
|       | -                        | -                 | -                  | -                     |                    |                       |
| TSU   | 4140                     | 2005              | 5354               | 4821                  | 786                | 1319                  |
|       | 4620                     | 2165              | 5839               | 5306                  | 946                | 1479                  |
|       | 4800                     | 2165              | 6019               | 5486                  | 946                | 1479                  |
|       | 5030                     | 2305              | 6244               | 5726                  | 1086               | 1619                  |
|       | 5340                     | 2455              | 6554               | 6021                  | 1236               | 1769                  |
|       | 5560                     | 2530              | 6774               | 6241                  | 1311               | 1844                  |
|       | 5920                     | 2690              | 7134               | 6601                  | 1471               | 2004                  |
|       | 6190                     | 2800              | 7404               | 6871                  | 1581               | 2114                  |
|       | 6650                     | 3000              | 7864               | 7331                  | 1781               | 2314                  |
|       | 7135                     | 3230              | 8349               | 7816                  | 2011               | 2544                  |
|       | -                        | -                 | -                  | -                     | -                  | -                     |
| HI-LO | 2935                     | 2005              | 4155               | 3627                  | 786                | 1314                  |
|       | 3255                     | 2165              | 4475               | 3947                  | 946                | 1474                  |
|       | 3530                     | 2305              | 4750               | 4222                  | 1086               | 1614                  |
|       | 3760                     | 2455              | 4980               | 4452                  | 1236               | 1764                  |

**Note:** Performance may vary + 5 % and - 10 % due to motor and system efficiency tolerance. The performance shown represents nominal values which may be obtained under typical operating conditions of a machine. CLARK products and specifications are subject to change without notice.

# PRODUCT DESCRIPTION



The CLARK electric forklift trucks in the SE25-35 series offer performance, safety and ergonomics. The electric counterbalance trucks keep your logistics moving - without harmful emissions. With our advanced SMART display, which informs the operator of all important driving parameters, the two powerful, low-noise drive motors and a design that is built to last, the SE25-35 represents the next generation of electric forklift trucks.

## Lithium-ion technology

Thanks to fast charging times, the SE25-35 electric forklift trucks with lithium-ion battery (Li-Ion) can be used almost without interruption. The CLARK Li-ion battery with 80 volts and 560 Ah is available in two battery tray sizes and can be used for both wheelbases (battery compartments). The charger with 80 volts, 120 A requires a high-voltage connection (CEE 16 A plug). The charging status of the Li-ion battery is shown on the vehicle display. The battery management system (BMS) has a safety cut-out and thus ensures safe use of the battery. Possible error codes of the BMS are also shown on the vehicle display.

## Driver's workplace

- Ergonomic driver's workplace that offers plenty of legroom
- Minimal vibrations
- Non-slip metal step (step height: 420 mm)
- Non-slip foot area
- Large grab handle on the driver's side makes getting on and off easier
- Adjustable steering column for more leg and foot room
- Small steering wheel diameter ( $\varnothing = 300$  mm)
- Hydraulic power steering
- Adjustable seats with mechanical or air suspension
- Hydraulic control via lever on the bonnet or electronic hydraulic control via mini levers
- Ergonomically arranged drive and brake pedals
- Low front panelling for optimum visibility
- Very good mast visibility due to double primary cylinders
- Cup holder, storage box and document holder with optional 12 V power connection or USB charging connection

## Smart display

- Clear, easy-to-read 5-inch colour display
- Splash-proof
- Maintenance display and password-protected service access
- Customisable driving behaviour (including adjustable acceleration, electric braking behaviour and speed reduction when cornering)

## Drive and control

### Traction motors:

- Two powerful AC motors, each with 9.0 kW and 80 volt three phase technology
- Automatic protection: The motor power is automatically reduced to protect components from overheating.
- ZAPI DUAL AC control unit is protected in the counterweight.

## Steering system

- Hydrostatic power steering
- Robust steering axle with 101° steering angle
- Automatically engaging, electric parking brake with roll-back protection on inclines and ramps
- Maintenance-free, wet multi-disc brake

## Hydraulic system

- Large hydraulic oil tank ensures that there is always enough hydraulic oil for all mast and attachment types
- Full-flow return filter filters the oil every time it returns to the tank. Coarse particles are filtered directly via a suction filter and therefore do not enter the oil circuit. This ensures a long service life for all hydraulic components.

## Lift mast

- The clear-view masts are available in Standard, Hilo and Triplex versions
- Very good visibility
- Double primary cylinders
- CLARK mast damping absorbs shocks during the transition between the individual mast stages
- Robust 6-roller fork carriage with adjustable side support rollers for long service life

## Additional standard equipment

- Headlights (LED)
- SE tyres
- Indicators, rear combination light with brake light and white rear light (LED).
- Paintwork in bright safety colour „CLARK HOT YELLOW GREEN“
- Canopy and mast in matt black, rims in gloss black

## Additional options

- Non-creeping SE tyres
- Cab variants
- Rain protection (PVC roof)
- Weather protection (steel roof and windscreen)
- Partial cab (steel roof, front and rear windscreen)
- Full cab
- Mini levers integrated in the armrest with direction of travel switch
- Direction of travel switch on the mechanical hydraulic lever
- Integrated or hook type sideshift
- Fork positioner
- Lateral battery change using a hand pallet truck (only for SE30/ SE35)
- Reversing camera
- 12 volt power connection
- USB charging connection
- Blue safety light as visual reversing warning
- Load weight indicator
- CLARK Vertical Mast System (VMS): When the function is activated, the tilting process of the mast stops automatically in a vertical position
- Various seats with armrest or side support bar
- Quick-release couplings
- Acoustic reversing alarm

## Safety

The SE-Series is CE-certified and complies with all European safety standards. Contact your local CLARK dealer to find the right configuration for your needs.

CLARK Europe GmbH  
Dr.-Alfred-Herrhausen-Allee 33  
47228 Duisburg / Germany  
Tel.: +49 (0)2065 499 13-0  
Fax : +49 (0)2065 499 13-290  
E-Mail: [Info-europe@clarkmheu.com](mailto:Info-europe@clarkmheu.com)  
[www.clarkmheu.com](http://www.clarkmheu.com)

Dealer:

